36" Under Cabinet Hood

UXT4236AY

Key Features

- Convertible Under Cabinet Hood **(New Design)**
- Vertically Exhausts up to 225 CFM with a 3 1/4" x 10" Rectangular or 7" Round Duct
- Axial Fan
- Covered, 75-Watt Incandescent Light with 2 Light Levels
- Variable Speed, Rotary Control
- Dishwasher-Safe Washable Grease Filter

36" Under Cabinet Hood

UXT4236AY

Specifications

MODEL NO.	UXT4236AY
Type	Convertible
DUCT TYPE	
Round 7"	Yes
Rectangular 3 1/4" x 10"	Yes
Washable Grease Filter	Yes
VERTICAL CFM	
7" Round	232
3 1/4" x 10" Rectangular	213
HORIZONTAL CFM	
3 1/4" x 10"	216
VERTICAL SONES	
7" Round	6.5
3 1/4" x 10" Rectangular	7
GENERAL INFORMATION	
Horizontal Sones	6.4
Control	Variable Speed, Rotary
Adapter/Vent Connector	3 1/4" x 10" (included) 7" Optional
Blower	Axial Fan
Lighting	2 Level Incandescent (75-Watt)
Title 24 Compliant	Yes
Range/Cooktop Compatibility	Up to 40K BTU
Approx. Shipping Weight (lbs.)	15
OPTIONAL ACCESSORIES	
Convertible to Non-Vented Mode (Recirculation Kit)	W10355450
Power Cord	W10355452
7" Round Damper	W10355451
7" Round Adapter/Vent Connector	W10388168
3 1/4" x 10" Rectangular Damper Kit	W10398259
COLOR AVAILABILITY	**W,B,S**

Note: CFMs are based on IEC standard

* W-White, B-Black, S-Stainless Steel

Installation Requirements

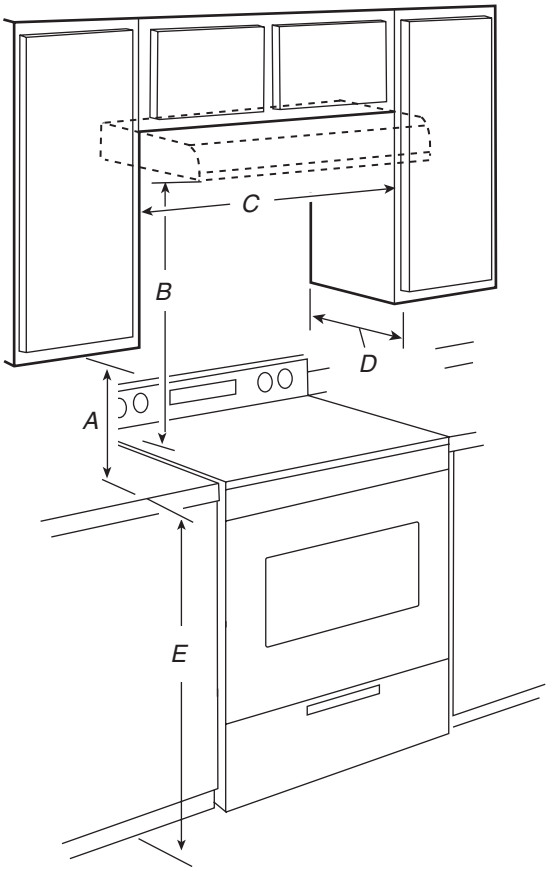

A. 18" (45.7 cm) min. clearance - upper cabinet to countertop

B. 18" (45.7 cm) to 24" (61.0 cm) suggested max. - bottom of range hood to cooking surface

C. 30" (76.2 cm) min. cabinet opening width for 30" (76.2 cm) models and 36" (91.4 cm) min. cabinet width for 36" (91.4 cm) models.

D. 13" (33.0 cm) cabinet depth

E. 36" (91.4 cm) base cabinet height

Dimensions

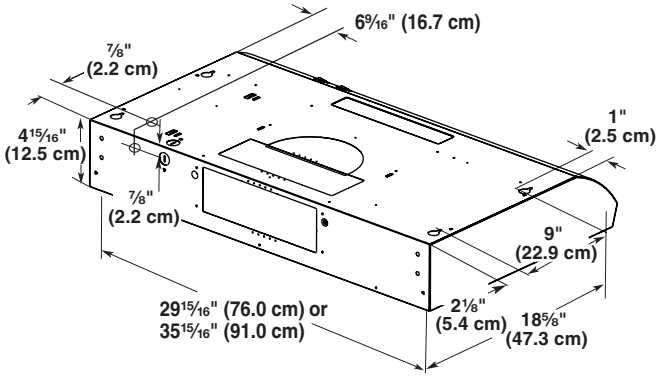

Dimensions are for planning purposes only.
For complete details, see Installation Instructions packed with product.
Specifications subject to change without notice.

®Registered trademark/™ Trademark of Whirlpool, U.S.A. ©2011. All rights reserved.